


Instrumentation Products

Air Headers

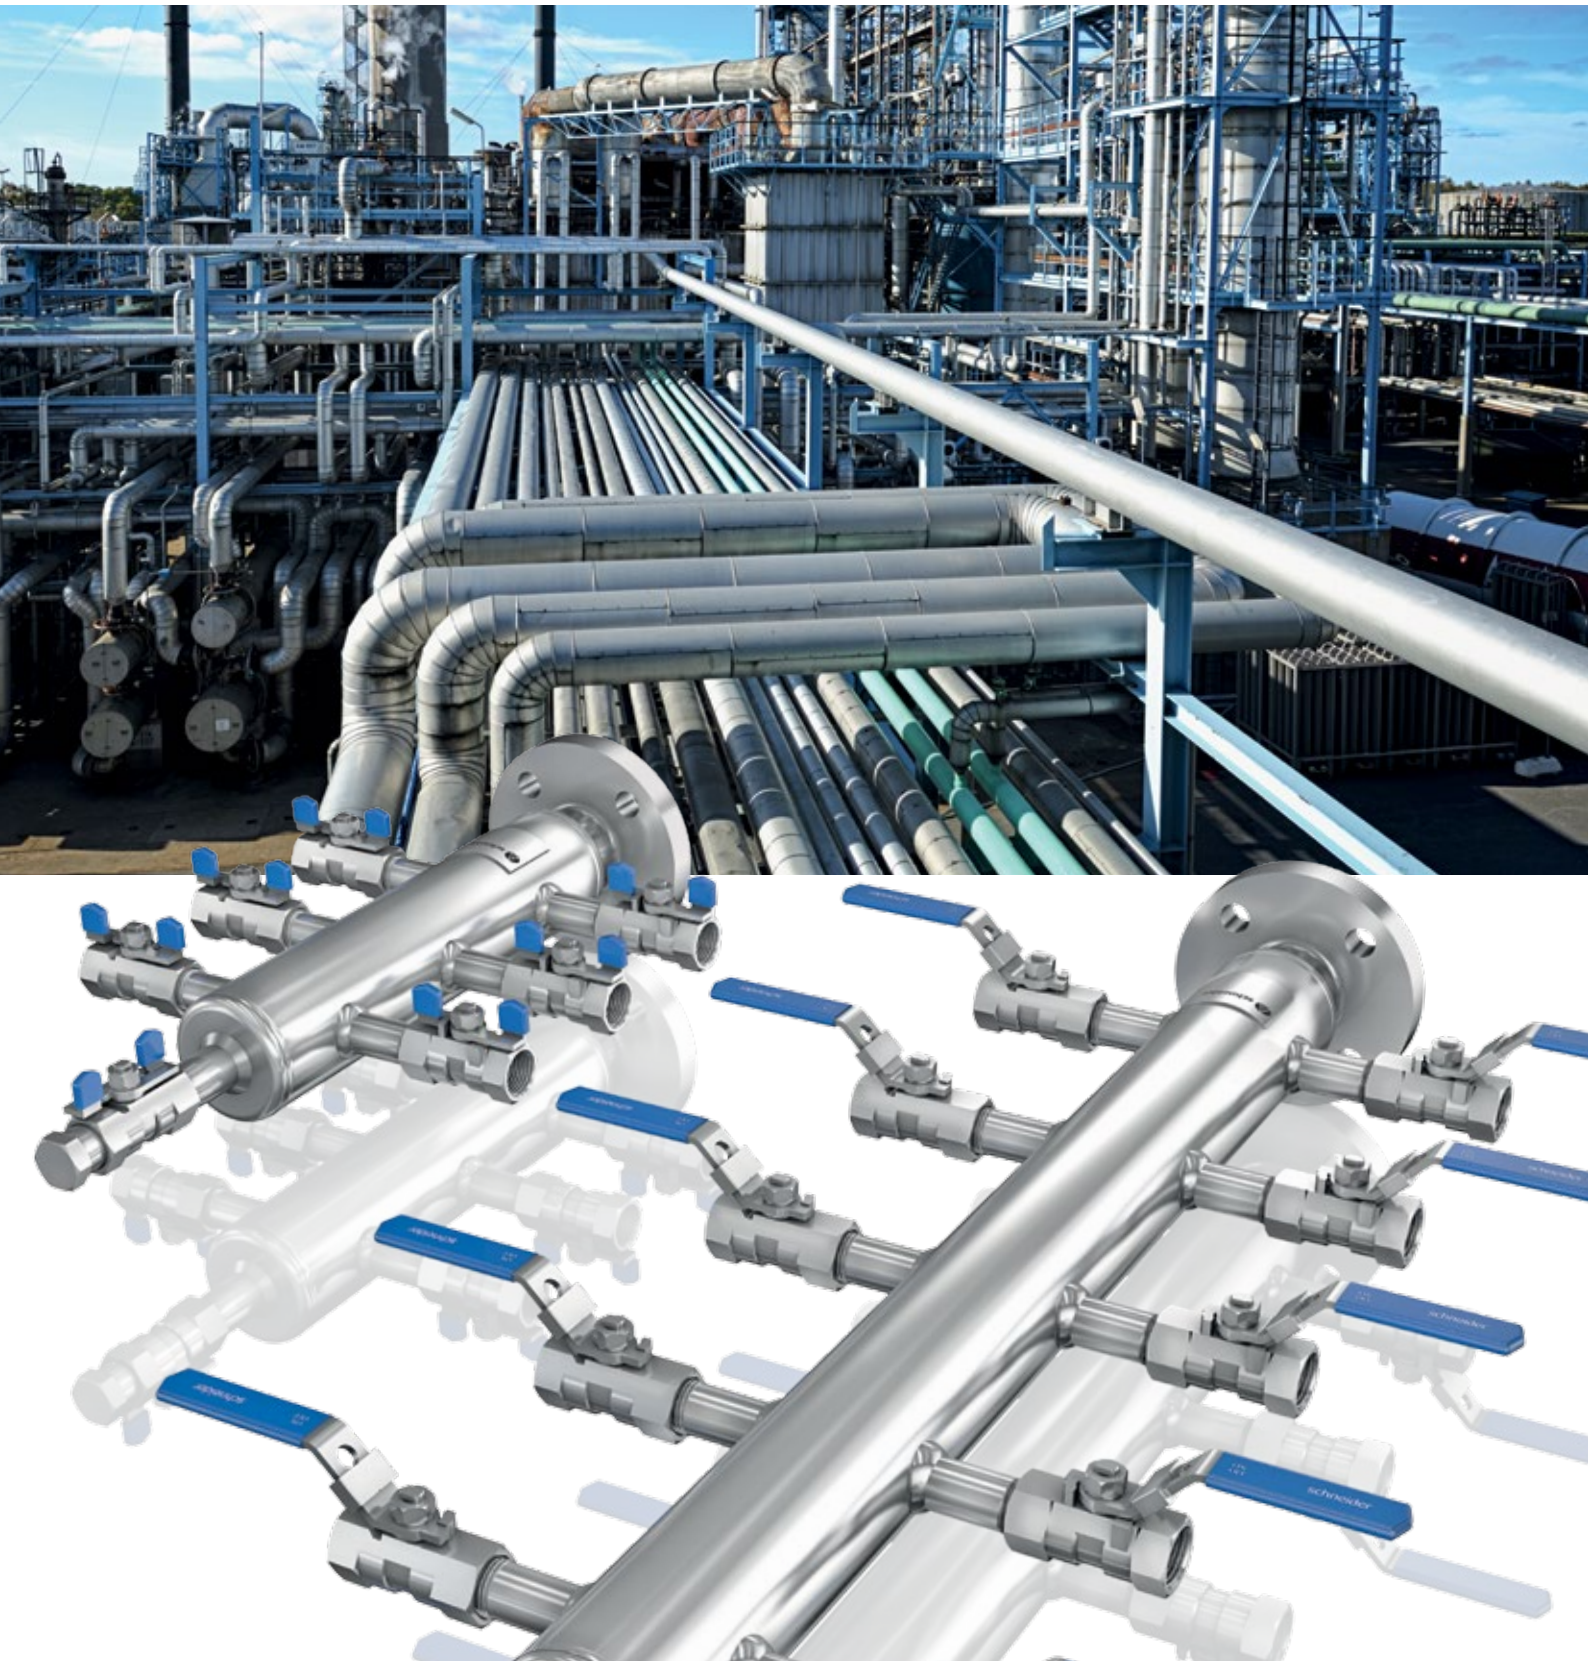

General Features

Introduction

The **AS-Schneider Group** with its headquarters in **Germany** is one of the **World's Leading Manufacturers of Instrumentation Valves and Manifolds**. **AS-Schneider** offers a large variety of **Air Headers** needed for the instrumentation installations globally.

AS-Schneider Air Headers are used to supply several users with instrument air. Besides multiple types of standard styles we also supply the Air Headers in accordance with specific customer demands.

Selection can be made from a comprehensive range of pipe styles with a variety of connections and material options, optimising installation and access opportunities. Some of the Air Headers shown in this catalogue are available from stock or within a short period of time. The dimensions shown in this catalogue apply to standard types. If you need the dimensions for your individual type please contact the factory.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. AS-Schneider reserves the right to make such changes at their discretion and without prior notice.

All dimensions shown in this catalogue are approximate and subject to change.

Standard Features

- Distribution Pipe:
 - 2" Pipe
- Lever Operated Ball Valves with Locking Device
- Inlet:
 - Flange according to ASME or EN
 - Threaded
- Outlet Ports:
 - Ball Valves
 - Needle Valves
 - Tube Fittings
 - Threaded
- Material
 - Stainless Steel


Optional Features

- Mounting Bracket
- Certificates according to EN 10204

Pressure-Temperature Rating:

Max. allowable (Working) Pressure (PS): 40 bar (580 psi)

Max. allowable Temperature (TS): 50°C (122°F)

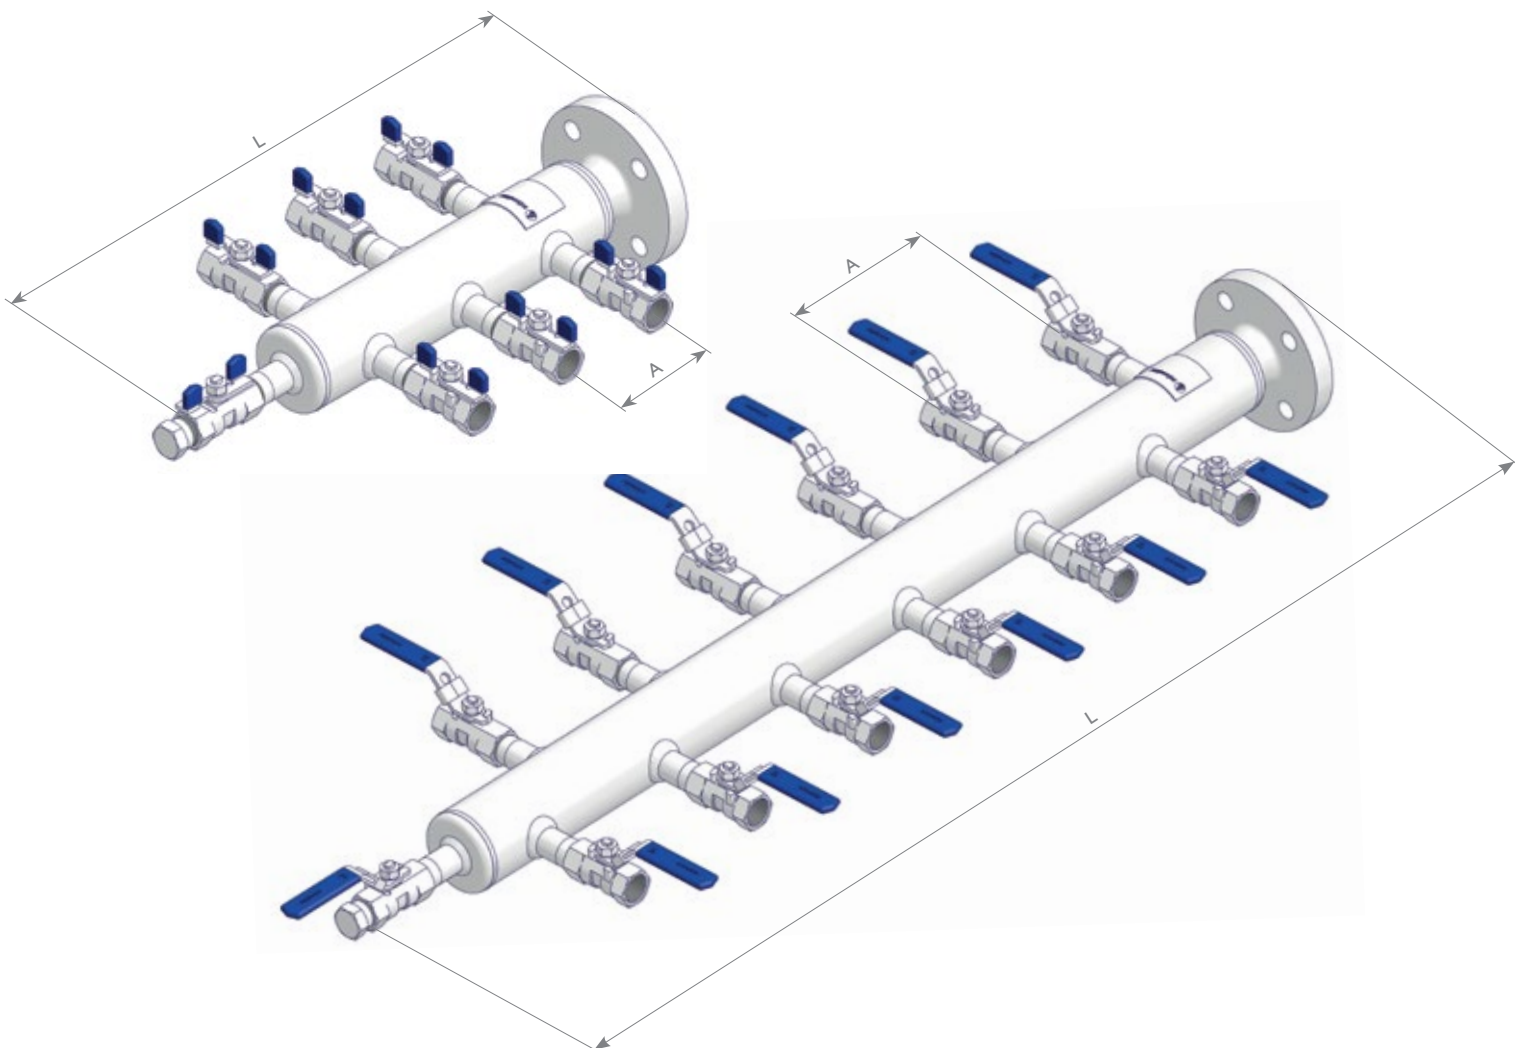

Ordering Information

		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		L	2	0	6	–	N	G	A	–	A	0	4	4	P	
Air Headers																
Size																
2	2" Pipe															
Number of Outlet Ports																
Approx. Length (L)																
		Dim. A 80 mm		Dim. A 120 mm												
06	6 Outlets (3 on each side)	400 mm		480 mm												
08	8 Outlets (4 on each side)	470 mm		590 mm												
10	10 Outlets (5 on each side)	570 mm		730 mm												
12	12 Outlets (6 on each side)	650 mm		850 mm												
36	6 Outlets (3 on each side, offset)	500 mm		580 mm												
42	12 Outlets (6 on each side, offset)	740 mm		940 mm												
Inlet																
NGA	Flange 1" Class 150 RF	JN6	3/4 NPT Male													
NGB	Flange 1" Class 300 RF	JN8	1 NPT Male													
QLD	Flange EN1092-1 DN25 PN40 B1	LN6	3/4 NPT Female													
JJ6	G 3/4 Male (BSP Parallel)	LN8	1 NPT Female													
JR8	R 1 Male (BSP Tapered)															
LP6	Rp 3/4 Female (BSP Parallel)															
LP8	Rp 1 Female (BSP Parallel)															
Outlet Port																
Dimension A																
A04	Ball Valve 1/2 NPT Female, Butterfly Handle	80 mm														
A02	Ball Valve 1/4 NPT Female, Butterfly Handle	80 mm														
B04	Ball Valve 1/2 NPT Female, Lever Operated	120 mm														
B02	Ball Valve 1/4 NPT Female, Lever Operated	120 mm														
ATD	Ball Valve, Butterfly Handle with Single Ferrule Tube Fitting Size 12S	80 mm														
BTD	Ball Valve, Lever Operated with Single Ferrule Tube Fitting Size 12S	120 mm														
AAD	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting A-lok 12 mm	80 mm														
AAM	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting A-lok 1/2"	80 mm														
ASD	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting Swagelok 12 mm	80 mm														
ASM	Ball Valve, Butterfly Handle with Twin Ferrule Tube Fitting Swagelok 1/2"	80 mm														
BAD	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting A-lok 12 mm	120 mm														
BAM	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting A-lok 1/2"	120 mm														
BSD	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting Swagelok 12 mm	120 mm														
BSM	Ball Valve, Lever Operated with Twin Ferrule Tube Fitting Swagelok 1/2"	120 mm														
004	1/2 NPT Male	80 mm														
002	1/4 NPT Male	80 mm														
Drain Connection																
4	Valve Type as above, 1/2 NPT plugged															
2	Valve Type as above, 1/4 NPT plugged															
J	1/2 NPT Male															
H	1/4 NPT Male															
Material																
P	Stainless Steel															
Options – Specify in alphabetical order (digits first, then letters)																
P	Mounting Bracket for 2" Pipe c/w 'U' Bolt															
W	Mounting Bracket for Wall Mounting															



**Armaturenfabrik Franz Schneider
GmbH + Co. KG**

Bahnhofplatz 12 | 74226 Nordheim
Deutschland / Germany

Tel: +49 71 33 101-0

Fax: +49 71 33 101-148



www.as-schneider.com



AS-Schneider Asia-Pacific Pte. Ltd.

970 Toa Payoh North, #02-12/14/15
Singapore 318992

Tel: +65 62 51 39 00

Fax: +65 62 51 39 90



www.as-schneider.sg



Armaturenfabrik Franz Schneider SRL

Sales Office:
Str. Basarabilor, Nr. 7 | 100036 Ploiesti
Romania

Tel: +40 244 384 963

Fax: +40 244 384 963

Production Plant:
Str. Mihai Viteazu, Nr. 327i | 507085 Harman
Jud. Braşov | Romania

Tel: +40 368 41 40 25

Fax: +40 368 41 40 26



www.as-schneider.ro



AS-Schneider Middle East FZE

P.O. Box 18749 | Dubai
United Arab Emirates

Tel: +971 4 880 85 75

Fax: +971 4 880 85 76



www.as-schneider.ae



AS-Schneider America, Inc.

17471 Village Green Dr | Houston, TX 77040
United States of America

Tel: +1 281 7 60 10 25

Fax: +1 281 5 06 79 35



www.as-schneider.com